

ER 48/T TYPE



Protection rate: IP00 Insulation class: B (130°C) Reference cycle: 3 minutés Standard stroke (s): 8 mm Temperature rise "∆V31": 70°C Working temperature: -10 to 45°C

Work: Pull

Release spring NOT incorporated on standard product

(ED) Duty-cycle ED(%)	100	40	25	15	5			
(P20) Power at 20°C (W)	15	35	54	89	271			
(Fm) Solenoid force (N) 1)	9.1	19.5	26.7	32.5	45.1			
Max time under voltage(s)	Inf	72	45	27	9			
Opening time (ms) 2)	125	102	90	82	76			
Release time (ms) 3)	83	69	62	57	53			
Plunger weight (Kg)	0.066							
Solenoid weight (Kg)	0.292							

- 1) Fm Solenoid force is given acording to VDE0580 without deducting the spring force or the plunger weight if vertical mounting.
- 2) Time is given on these conditions: Coil supplied under nominal voltage; Stabilized in it's working temperature; Load 70% of the solenoid force; Horizontal assembly; Standard stroke initial position; 20°C ambient temperature.
- 3) Time is given on these conditions: without load on shaft; Horizontal assembly; Standard stroke initial position.

Duty-cycle	Standard voltages							Under demand					
·	VDC					VAC		VDC		VAC			
ED%	6	12	24	48	100	125	205	110	230	Min	Max	Min	Max
100	0	0	0	0	0	0	0	0	0	5	230	34	230
40	Х	0	0	0	0	0	0	0	0	7	230	86	230
25	Х	0	0	0	0	0	0	Х	0	9	230	136	230
15	Х	0	0	0	0	0	0	Х	0	11	230	230	230
5	Х	Х	0	0	0	0	0	Х	Х	16	230	Х	Х

Layout: o = Available; x = Unavailable


- Voltage under demand:
- They can be manufactured at voltages between the maximum and minimum voltage values shown in the chart.
- To feed in alterning current the solenoid will have a rectifier incorporated in the coil.
- The duty cycles described in the chart are standard, they can be manufactured in any intermediate value.
- If any customization from the original is needed, please ask us.
- Earthing is recommended if the metallic parts are accessible.


Ordering code: ER48/T --V ED---%

Voltage: 24Vdc; Duty cycle: ED100%: ER48/T 24Vdc ED100%

Voltage: 48Vdc; Duty cycle: ED15%:

ER48/T 48Vdc ED15%

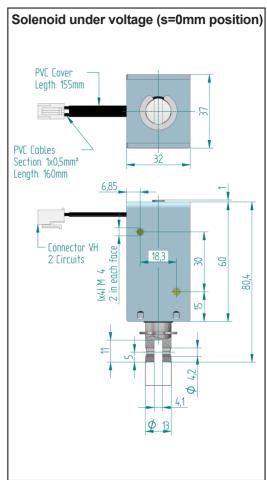

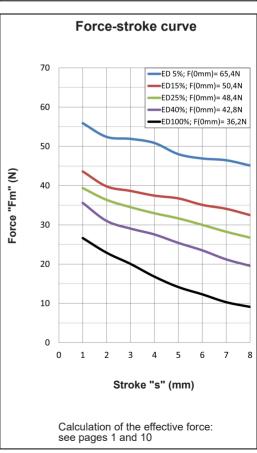

For fixation and mounting positions: see page 10