

## • ER 60-10/CT TYPE



Protection rate: IP00
Insulation class: B (130°C)
Reference cycle: 5 minutes
Standard stroke (s): 10 mm
Temperature rise "ΔV<sub>31</sub>": 70°C
Working temperature: -10 to 45°C

Work: **Push** / Pull



Release spring will be incorporated by defect

Standard spring force: Fs(s=0mm) = 4.3N Fs(s=10mm) = 3.2N

(ED) Duty-cycle ED(%)	100	40	25	15	5			
(P20) Power at 20°C (W)	18	45	70	110	280			
(Fm) Solenoid force (N) 1)	11.6	23.6	31.6	43.6	79.6			
Max time under voltage(s)	Inf	120	75	45	15			
Opening time (ms) 2)	187	134	126	111	108			
Release time (ms) 3)	119	87	83	74	72			
Plunger weight (Kg)	0.148							
Solenoid weight (Kg)	0.681							

- 1) Fm Solenoid force is given according to VDE0580 without deducting the spring force or the plunger weight if vertical mounting.
- 2) Time is given on these conditions: Coil supplied under nominal voltage; Stabilized in it's working temperature; Load 70% of the solenoid force; Horizontal assembly; Standard stroke initial position; 20°C ambient temperature.
- 3) Time is given on these conditions: Standard spring; without load on shaft; Horizontal assembly; Standard stroke initial position.

Duty-cycle	Standard voltages							Under demand					
·	VDC						VAC		VDC		VAC		
ED%	6	12	24	48	100	125	205	110	230	Min	Max	Min	Max
100	Х	0	0	0	0	0	0	0	0	7	230	48	230
40	Х	0	0	0	0	0	0	Х	0	11	230	125	230
25	Х	Х	0	0	0	0	0	Х	0	13	230	200	230
15	Х	Х	0	0	0	0	0	Х	Х	16	230	Х	Х
5	Х	Х	0	0	0	0	0	Х	Х	24	230	Х	Х

Layout: o = Available ; x = Unavailable


- Voltage under demand:
- They can be manufactured at voltages between the maximum and minimum voltage values shown in the chart.
- To feed in alterning current the solenoid will have a rectifier incorporated in the coil.
- The duty cycles described in the chart are standard, they can be manufactured in any intermediate value.
- If any customization from the original is needed, please ask us.
- Earthing is recommended if the metallic parts are accessible.


Ordering code: ER60-10/CT --V ED---% - Spring

Voltage: 24Vdc; Duty cycle: ED100%; With spring: ER60-10/CT 24Vdc ED100% RS

Voltage: 48Vdc; Duty cycle: ED15%; Without spring: ER60-10/CT 48Vdc ED15% RN

Spring yes: RS ; Spring no: RN

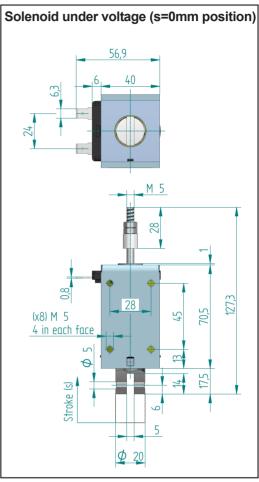

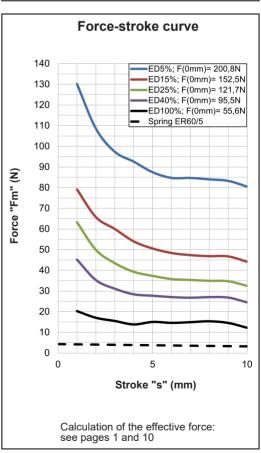

For fixation and mounting positions: see page 10