


• ERB SERIES

ERB serie electromagnets are bistable linear solenoids, where the stroke movement from initial (unlocked) to final position (locked) is made by electromagnetic forces, the return to initial position takes place by an inverse polarizing pulse combined with external forces or by an incorporated spring.

When it is off, the bistable solenoids has got two working and maintained positions. One will be held by a permanent magnet system and the other one by a return spring or external forces.

Its specifications makes this solenoid perfect to use when both unlocking and locking position are kept for a long time.

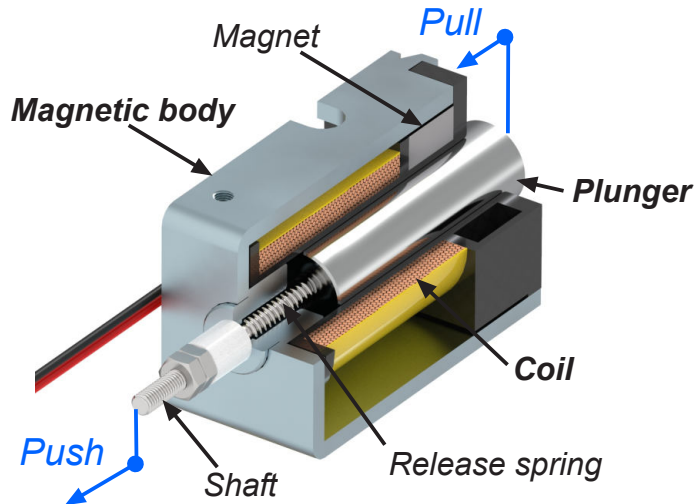

Structure, basic components:

Magnetic body:

It is the metal part containing a coil, the core, a magnet system and the fixation holes.

Coil:

It receives the electrical energy to create a magnetic field.

Plunger:

It moves along and inside the coil, it has got a non-magnetic shaft fixed to the plunger. If pulling is needed, fix the element to activate to the plunger. To push, fix the shaft to the element to activate.

• Datasheet rated values conditions (According to DIN VDE 0580):

The values of the magnetic force (F_m) depending on the stroke, are obtained in the following conditions:

Room temperature = 35°C

Coil stabilized at its working temperature.


Rated voltage equal to 90% of the standard one.

Solenoid working in horizontal position.

Work depending on the feeding mode:

Locked position

Red cable: +Vdc
Black cable: -Vdc



F-S: Force-stroke

(F-S) Coil+magnet

(F-S) Spring

Unlocked position

Red cable: -Vdc
Black cable: +Vdc



Effective force (F_h) is obtained from magnetic force (F_m), adding and subtracting the plunger weight.

- When the solenoid pulls upwards:

Transition of unlock to lock:

Effective force = Magnetic force - Plunger weight - Spring force

Transition of lock to unlock:

Effective force = Spring force + Plunger weight

- When the solenoid pulls downwards:

Transition of unlock to lock:

Effective force = Magnetic force + Plunger weight - Spring force

Transition of lock to unlock:

Effective force = Spring force - Plunger weight

- When the solenoid pulls in horizontal position

Transition of unlock to lock:


Effective force = Magnetic force - Spring force

Transition of lock to unlock:

Effective force = Spring force


- For the units with incorporated return spring:

Effective force = Magnetic force - Spring force \pm Plunger weight



• Important:

The fixation screws do not have to exceed the wall of the magnetic body not to damage the coil and magnets.

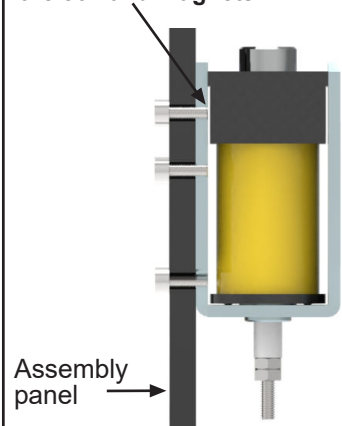

• CUSTOMIZATION ERB SERIES

The models described in the catalogue are standard and minimum manufacturing batches are not required. However, there is the possibility of customizing them to suit better customer's needs. See below some of the most common customizations.


If any modification is needed, please ask NAFSA about the possibility and the minimum manufacturing batch required.

1. ELECTRICAL CUSTOMIZATION

a) Electronics integrated in the coil:

a.1) For peak supression


Examples:



a.2) Thermal fuse


Examples:

*The thermic resettable polyswitches are used in coils with low duty cycles against overheating, caused by long time under voltage and not respected the duty cycle times. It can be used also as timer.



a.3) Thermal fuse and peak supression


Examples:



a.4) Double coil

Examples:


Our standard ERB series has only a coil, that has to be electrically polarized to get the desired movement sense, to avoid this supply polarization inversion we can produce the ERB series with two coils, that will be feeded individually to get the desired movement sense. The two coil version solenoid will have less force than the single one or higher power for the same force as the coil has to be divided in two.




b) Cable length modification and terminal or connector mounted over cables:

All bistable models have supply cables, this length can be modified to customer requirement. Likewise any kind of terminals or connectors can be added to the cables.


Example 1:



Example 2:



Example 3:



2. INSULATION CLASS CUSTOMIZATION:


Depending on the model, insulation class can be increased until B(130°C).

3. PROTECCIÓN RATE CUSTOMIZATION IP (EN60529): The standard model are IP00, but for the mechanical part IP40 can be obtained and for the electrical part IP65 through coil overmolding..

4. MECHANICAL CUSTOMIZATION


4.1) Shaft modifications:

Length and shape can be modified.

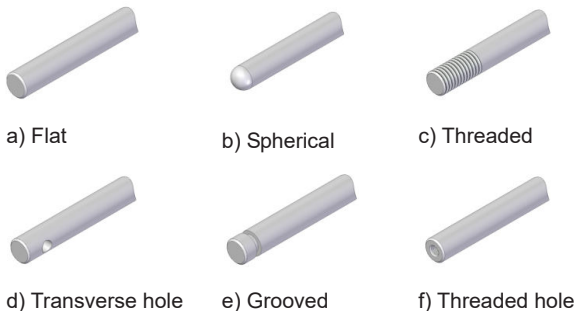


4.2) Plunger modifications:


Length and shape can be modified.

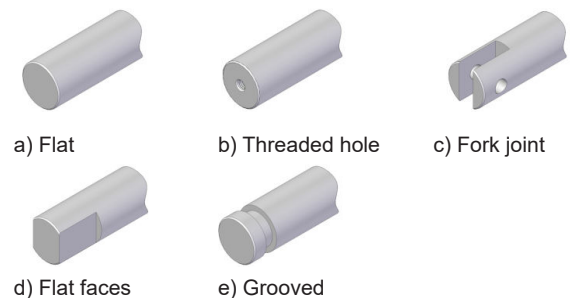

4.3) Fixing holes modification:




Model customized with extra holes and fixing sheet: ERB35/NS



Standard model: ERB35/N


4.4) Fastening element added as Fork joints as DIN71752:

Example:
ERB50/N+Fork joint



NOTE: All this customizations cannot be applied to all models, ask NAFSA for each case.

• ERB 20-15-06/C TYPE




Protection rate: **IP00**
 Insulation class: **Y (90°C)**
 Reference cycle: **3 minutes**
 Standard stroke (s): **8 mm**
 Temperature rise " ΔV_{31} ": **70°C**
 Working temperature: **-10 to 45°C**
 Work: **Push / Pull**

Release spring will be incorporated by defect

Standard spring force:
 $F_s(s=0\text{mm}) = 2.7 \text{ N}$
 $F_s(s=8\text{mm}) = 1.1 \text{ N}$

(Un) Standard voltage (Vdc)	24
(ED) Duty-cycle ED(%)	20
(P20) Power at 20°C (W)	10
Available voltage (Vdc)	from 5 to 24
Available voltage (Vac)	NOT AVAILABLE
Max time under voltage(s)	30
Plunger weight (Kg)	0.011
Solenoid weight (Kg)	0.047

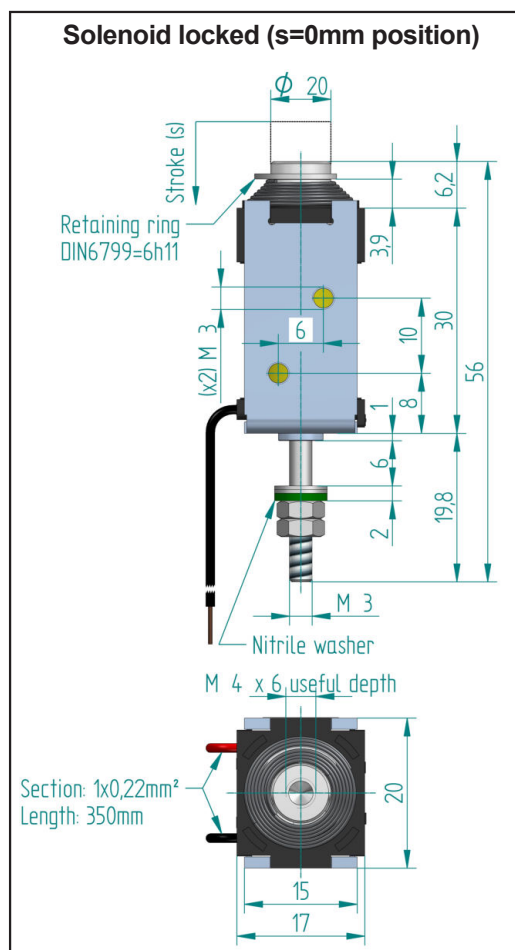


Work depending on feeding mode:

Locked position

Red cable: +Vdc
 Black cable: -Vdc

Unlocked position

Red cable: -Vdc
 Black cable: +Vdc

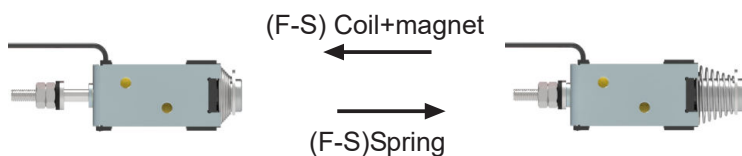

F-S: Force-stroke

- Voltage under demand:

They can be manufactured at voltages between the maximum and minimum voltage values shown in the chart.

- If any customization from the original is needed, please ask us.

- Earthing is recommended if the metallic parts are accessible.


Ordering code: ERB20-15-06/C --V ED25% - Spring

Voltage: 24Vdc; Duty cycle: ED25%; With spring:
 ERB20-15-06/C 24Vdc ED25% RS

Voltage: 12Vdc; Duty cycle: ED25%; Without spring:
 ERB20-15-06/C 12Vdc ED25% RN

Spring yes: RS ; Spring no: RN


Force-stroke curve

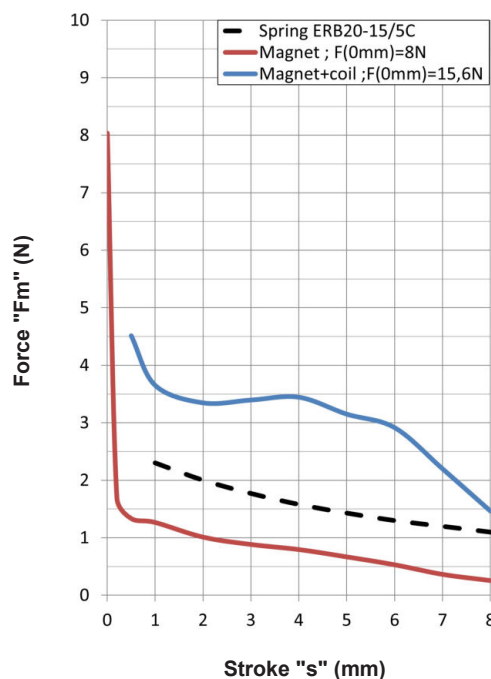

Calculation of the effective force:
 see pages 1 and 81

For fixation and mounting positions: see page 81

• ERB 50/N TYPE




Protection rate: **IP00**
 Insulation class: **Y (90°C)**
 Reference cycle: **3 minutes**
 Standard stroke (s): **10 mm**
 Temperature rise " ΔV_{31} ": **70°C**
 Working temperature: **-10 to 45°C**
 Work: **Push / Pull**

Release spring will be incorporated by defect

Standard spring force:
 $F_s(s=0\text{mm}) = 29.4 \text{ N}$
 $F_s(s=10\text{mm}) = 10 \text{ N}$

(Un) Standard voltage (Vdc)	24
(ED) Duty-cycle ED(%)	20
(P20) Power at 20°C (W)	67
Available voltage (Vdc)	from 12 to 205
Available voltage (Vac)	NOT AVAILABLE
Max time under voltage(s)	30
Plunger weight (Kg)	0.071
Solenoid weight (Kg)	0.365

Solenoid locked (s=0mm position)

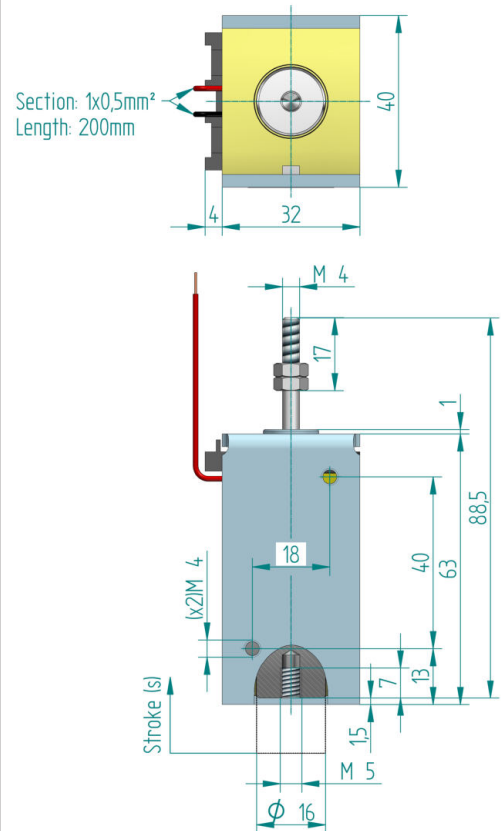


Work depending on feeding mode:

Locked position

Red cable: +Vdc
 Black cable: -Vdc

Unlocked position

Red cable: -Vdc
 Black cable: +Vdc

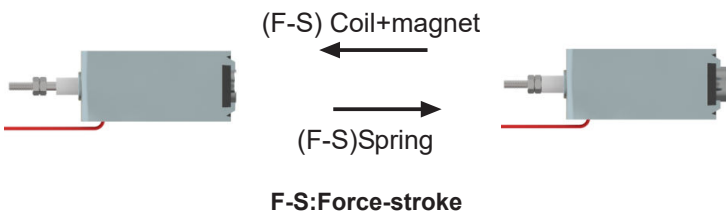

- Voltage under demand:

They can be manufactured at voltages between the maximum and minimum voltage values shown in the chart.

- If any customization from the original is needed, please ask us.


- Earthing is recommended if the metallic parts are accessible.

Ordering code: ERB50/N --V ED20% - Spring

Voltage: 24Vdc; Duty cycle: ED20%; With spring:
 ERB50/N 24Vdc ED20% RS

Voltage: 12Vdc; Duty cycle: ED20%; Without spring:
 ERB50/N 12Vdc ED20% RN

Force-stroke curve

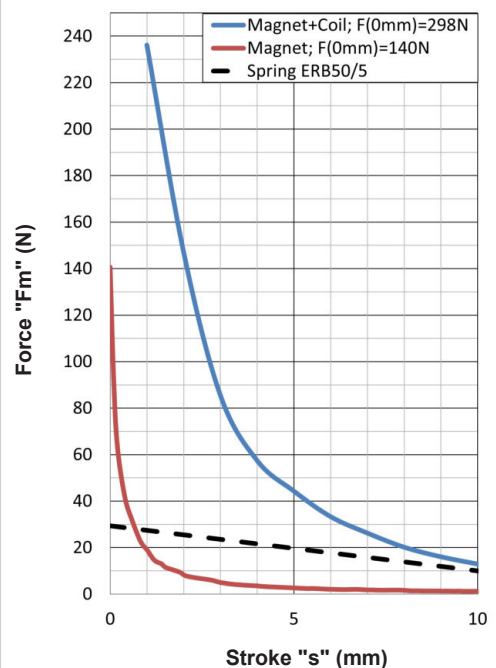


Calculation of the effective force:
 see pages 1 and 81

Spring yes: RS ; Spring no: RN

For fixation and mounting positions: see page 81

• ERDI 15 TYPE


This solenoid has two resting positions, the stroke movement "s" from a position to the other one is made by a polarized electric signal, the plunger is retained in each end of stroke position using permanent magnets.

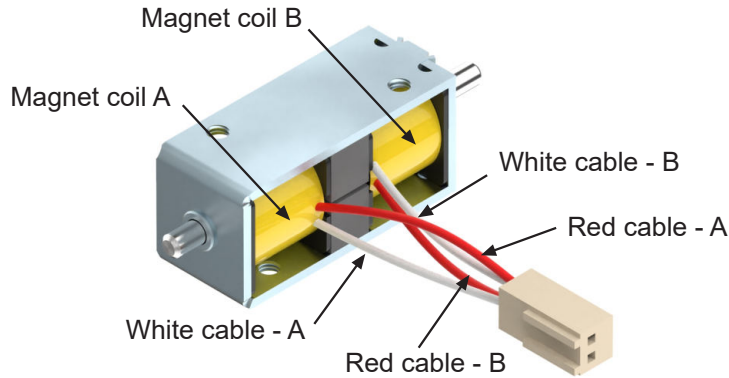


Protection rate: **IP00**
 Insulation class: **E (120°C)**
 Standard voltage: **from 6 to 12 Vdc**
 Under demand voltage: **Ask NAFSA**
 Standard stroke "s": **5mm**
 Duty cycle ED: **33%**
 Coil resistance at 20°C: **8 Ohm**
 Initial force: **1.5 N**
 Holding force: **6N**
 Plunger weight: **0.005 Kg**
 Solenoid weight: **0.040 Kg**

*Compulsory earthing if the metallic parts are accessible.


Connection scheme: Coil in parallel will be the standard configuration.

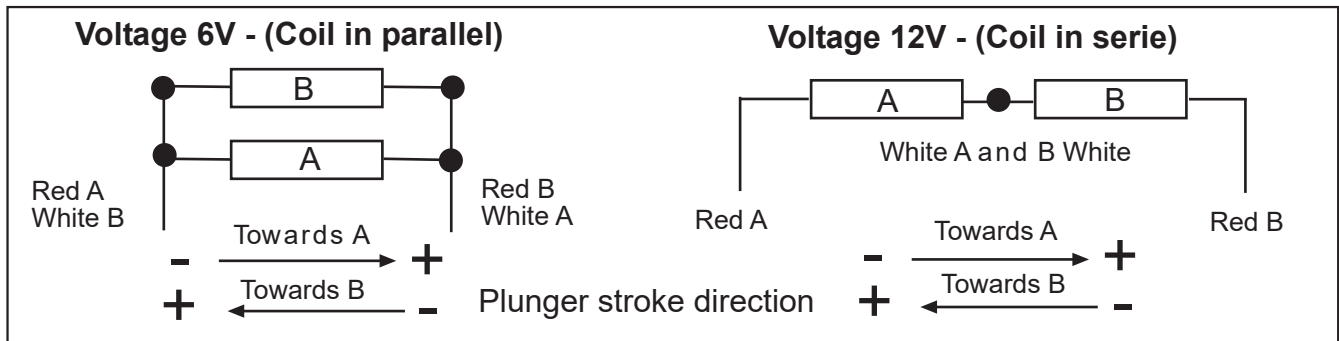

Dimensional drawing:

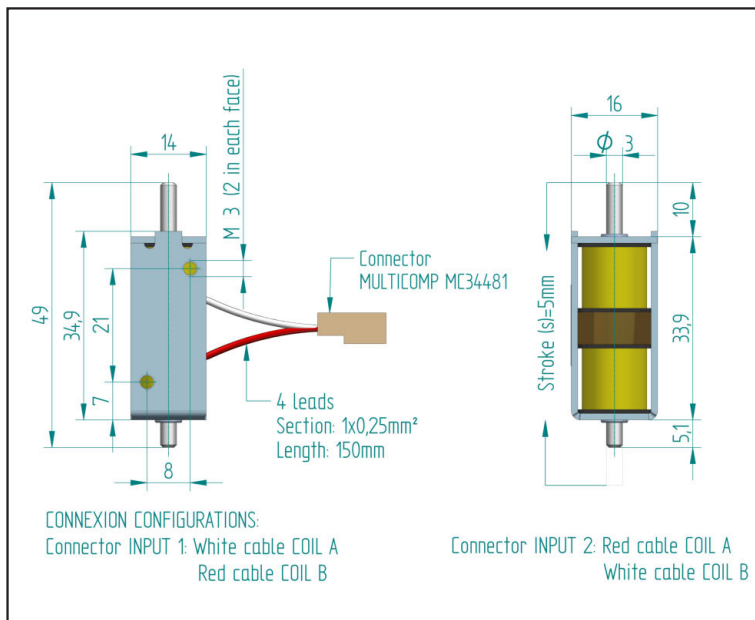

Force-stroke Curve (F-S)

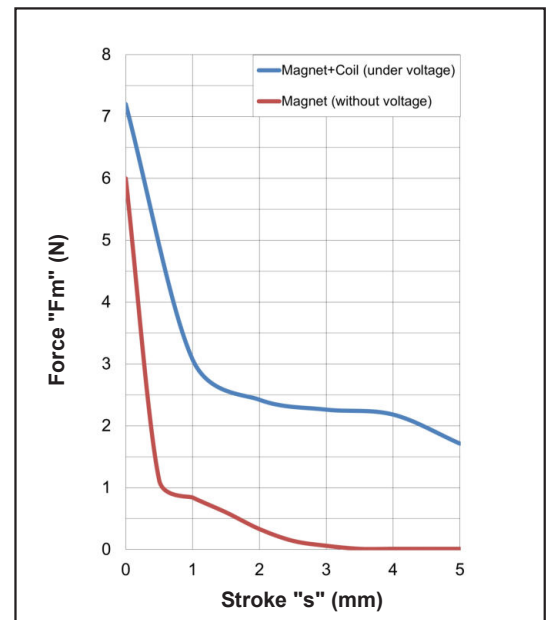


ASSEMBLY: the screw does not have to exceed the wall of the magnetic circuit

Ordering code:

Coil in parallel: **ERDI15 6V 33%, (standard configuration)**
 Coil in serie: **ERDI15 12V 33%, (special configuration)**

• ERDI 35-06/CC TYPE


This solenoid has two stable positions, the stroke movement "s" from a position to the other one is made by a polarized electric signal, the plunger is retained in each end of stroke position using permanent magnets.

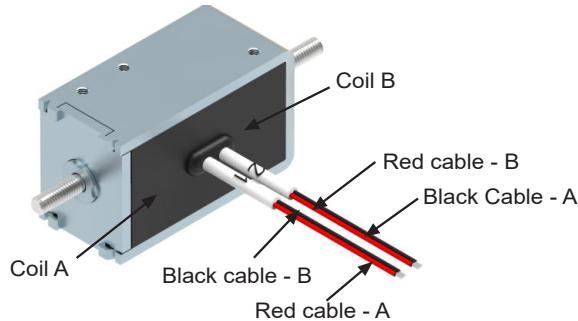

Protection rate: **IP40 EN60529**
 Insulation class: **Y (90°C)**
 Standard voltage: **24 Vdc**
 Voltages under demand: **from 6VDC to 250Vdc**
 Standard stroke "s": **6mm**
 Duty-cycle ED: **20%**
 Abs. power at 20°C: **28W (14W each coil)**
 Plunger weight: **0.028 Kg**
 Solenoid weight: **0.175 Kg**
 Holding force at stroke 0mm: **20N**

*Obligatory earthing if the metallic parts are accessible.

Connection scheme

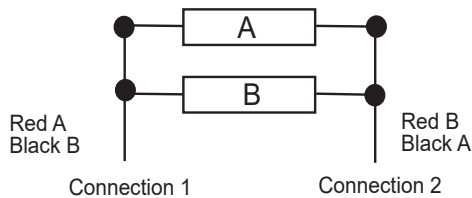


Work depending on the feeding mode:




Connection 1:
 +VDC and Connection 2: -VDC. The shaft will go to B position
Connection 2:
 +VDC and Connection 1: -VDC. The shaft will go to A position

Force-stroke curve

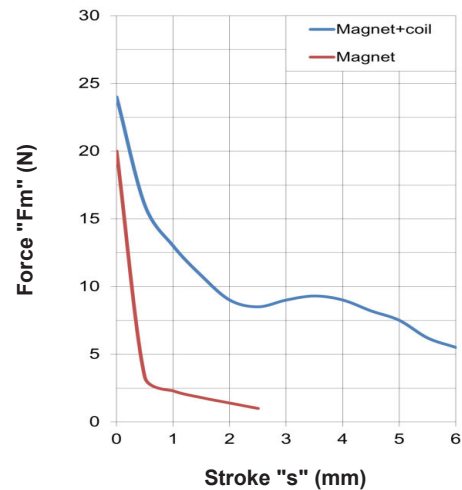

Dimensional drawing:

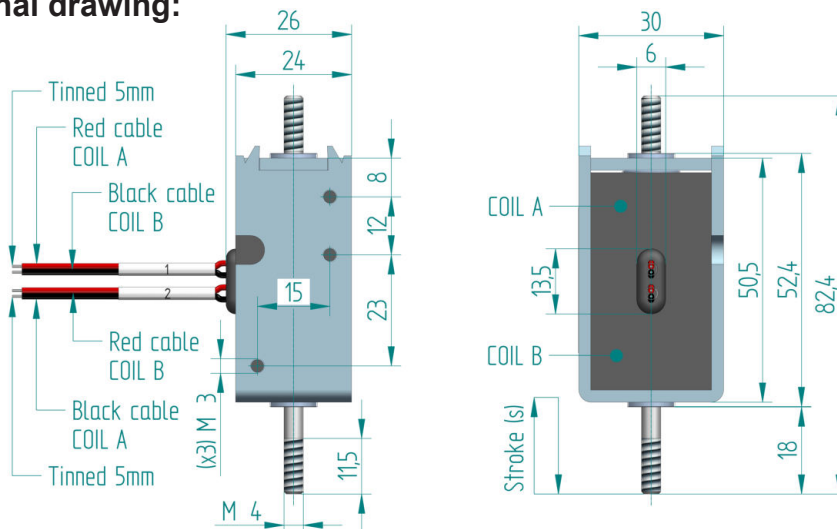

ASSEMBLY: the screw does not have to exceed the wall of the magnetic circuit

Ordering code: *ERDI35-06/CC--V ED20%*

Voltage: 6Vdc: *ERDI35-06/CC Vdc ED20%*

Voltage: 24Vdc: *ERDI35-06/CC 24Vdc ED20%*

• ECI 35/C TYPE




ECI serie electromagnets are bistable linear electromagnet, where the stroke movement from initial to final position is made by a incorporated spring.

When solenoid is in final position after been under voltage (See drawings bellow), the mechanical reset to the initial position has to be made by external forces acting on the mobile core.


The plunger is retened in the initial position by permanent magnets. To release the plunger is necessary feed the electromagnet with a low power polarized voltage signal.

Solenoid protection rate: **IP40**
 Insulation class: **Y (90°C)**
 Minimum release voltage: **6V**
 Duty-cycle ED: **100%**
 Standard stroke "s": **8 mm**
 Work: **Push**
 Magnetic retention force (F_{rm}): **44N**
 Initial force (F_e): **37N**
 Useful magnetic force ($F_{ru}=F_{rm}-F_e$): **7N**
 Final force (F_a): **18N**
 Mechanical response time: **5ms**
 Minimum energy of release: **30 mJ**
 Minimum duration of the electrical impulse: **20ms**
 Solenoid weight: **0.190 Kg**

Solenoid with compressed spring

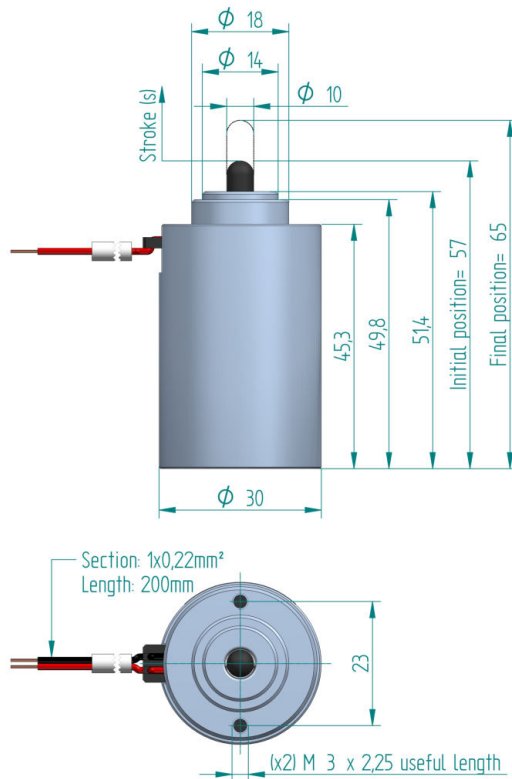

Force-stroke curve

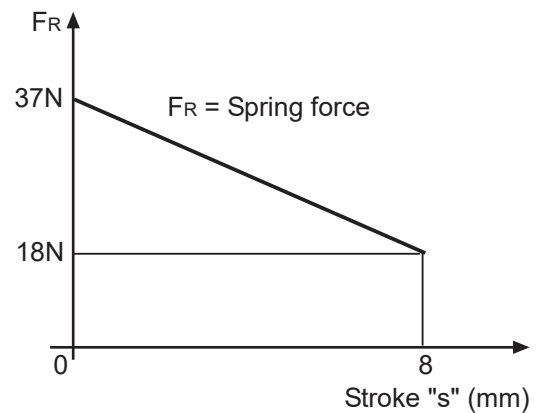

Working

↑ Solenoid push force



Position A (Initial position):
 Repose status (compressed spring), when the electromagnet is feeded it passes to position B.

↓ External force to reset



Position B (Final position):
 After voltage status (spring free). To return to position A, will be necessary to apply an external force

Ordering code: **ECI35/C 6Vdc ED100%**